SCS-20 MESH LIGHT CONTROL



CERTIFICATIONS

- UL Listed
- o ROHS Compliant
- O CE Certified

INPUTS

- o 120-277VAC
- **o** Bluetooth® Mesh

OUTPUTS

- 1x Channel 0-10V Dimming
- o 1x Relay
- **□** Bluetooth® Mesh

ENVIRONMENTAL

- Operating Temperature: -20°C to +50°C
- Operating Humidity: 8-80% RH



The SCS-20 Mesh LED Light Controller connects to a Bluetooth® mesh network and controls a group of lights using a 0-10V dimming and a relay output. Day/Night Times are programmable through the SCS-20 Mesh, as well.



Grow Room Fit-Out by GC with GC IMP & Dehu using Reheat Coils



2023 STORAGE CONTROL SYSTEMS, LTD. ALL RIGHTS RESERVED. CONTACT US FOR MORE INFORMATION

SCS-20 MESH LIGHT CONTROL

SPECIFICATIONS

INPUT POWER 120-277VAC 18AWG WIRE LEAD GAUGE

OUTPUT POWER 0/1-10V, Max 20mA OTHER SPECS Bluetooth® Mesh Network Communications; Integrated Bluetooth® Antenna

OUPUT RELAY Max 5A/20A

IP20 **ENCLOSURE RATING**


5 Year Limited WARRANTY

Controlled and Commissioned through

SCS LiveView App

Maximum Installation Distance from the closest Bluetooth® Mesh Device is typically 20-25m

WIRING DIAGRAM

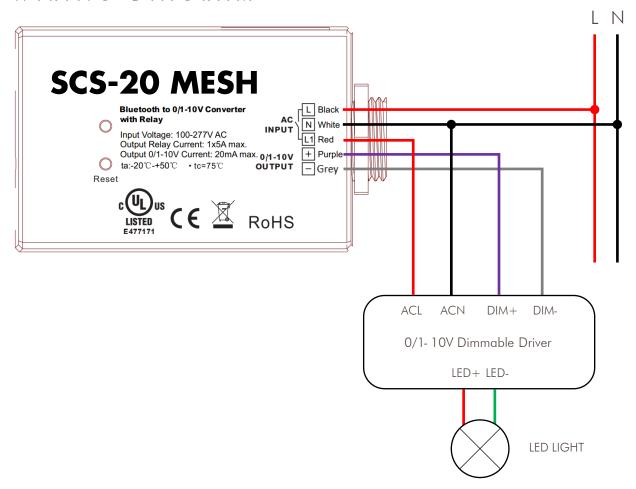

2023 STORAGE CONTROL SYSTEMS, LTD. ALL RIGHTS RESERVED. CONTACT US FOR MORE INFORMATION

